RC2014

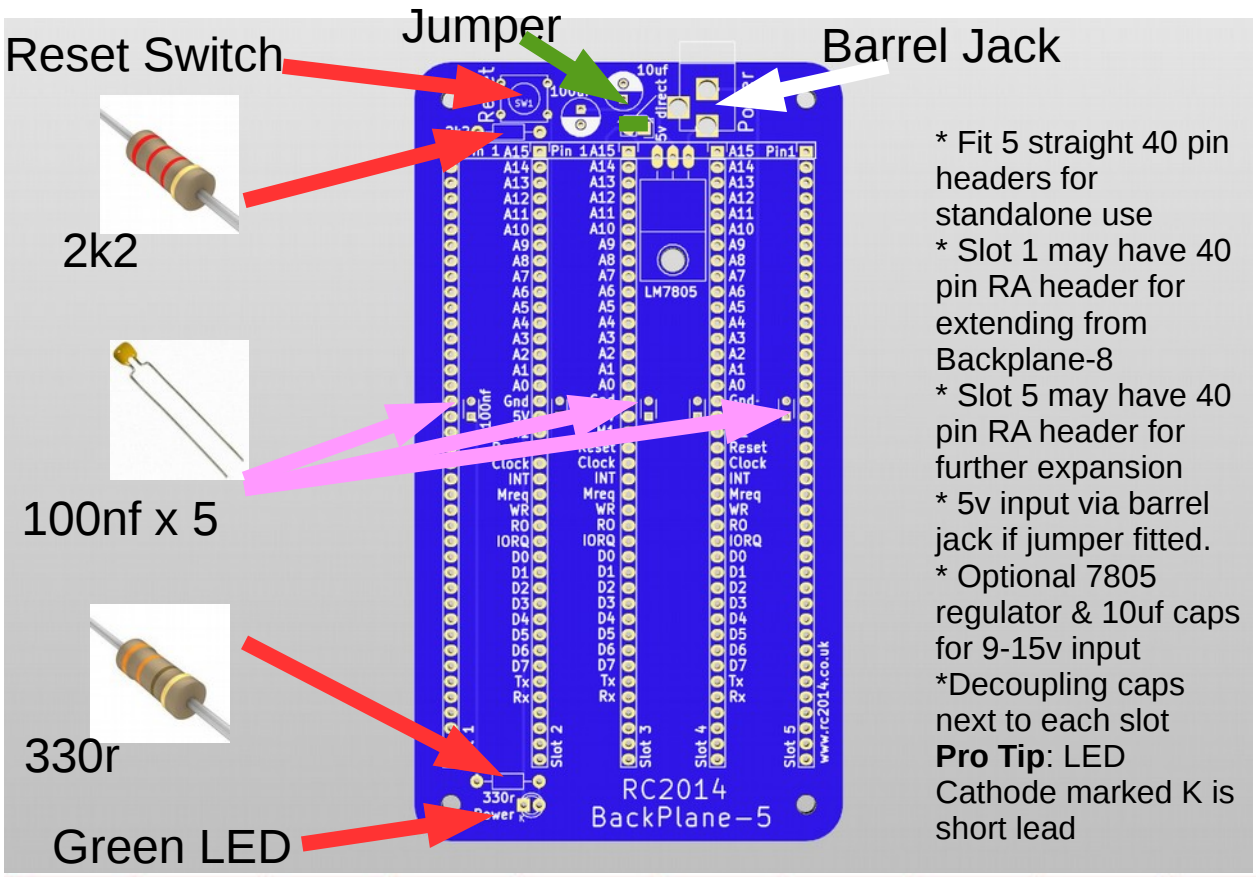

* Fit 5 straight 40 pin headers for standalone use
* Slot 1 may have 40 pin RA header for extending from Backplane-8
* Slot 5 may have 40 pin RA header for further expansion
* 5v input via barrel jack if jumper fitted.
* Optional 7805 regulator & 10uf caps for 9-15v input
*Decoupling caps next to each slot
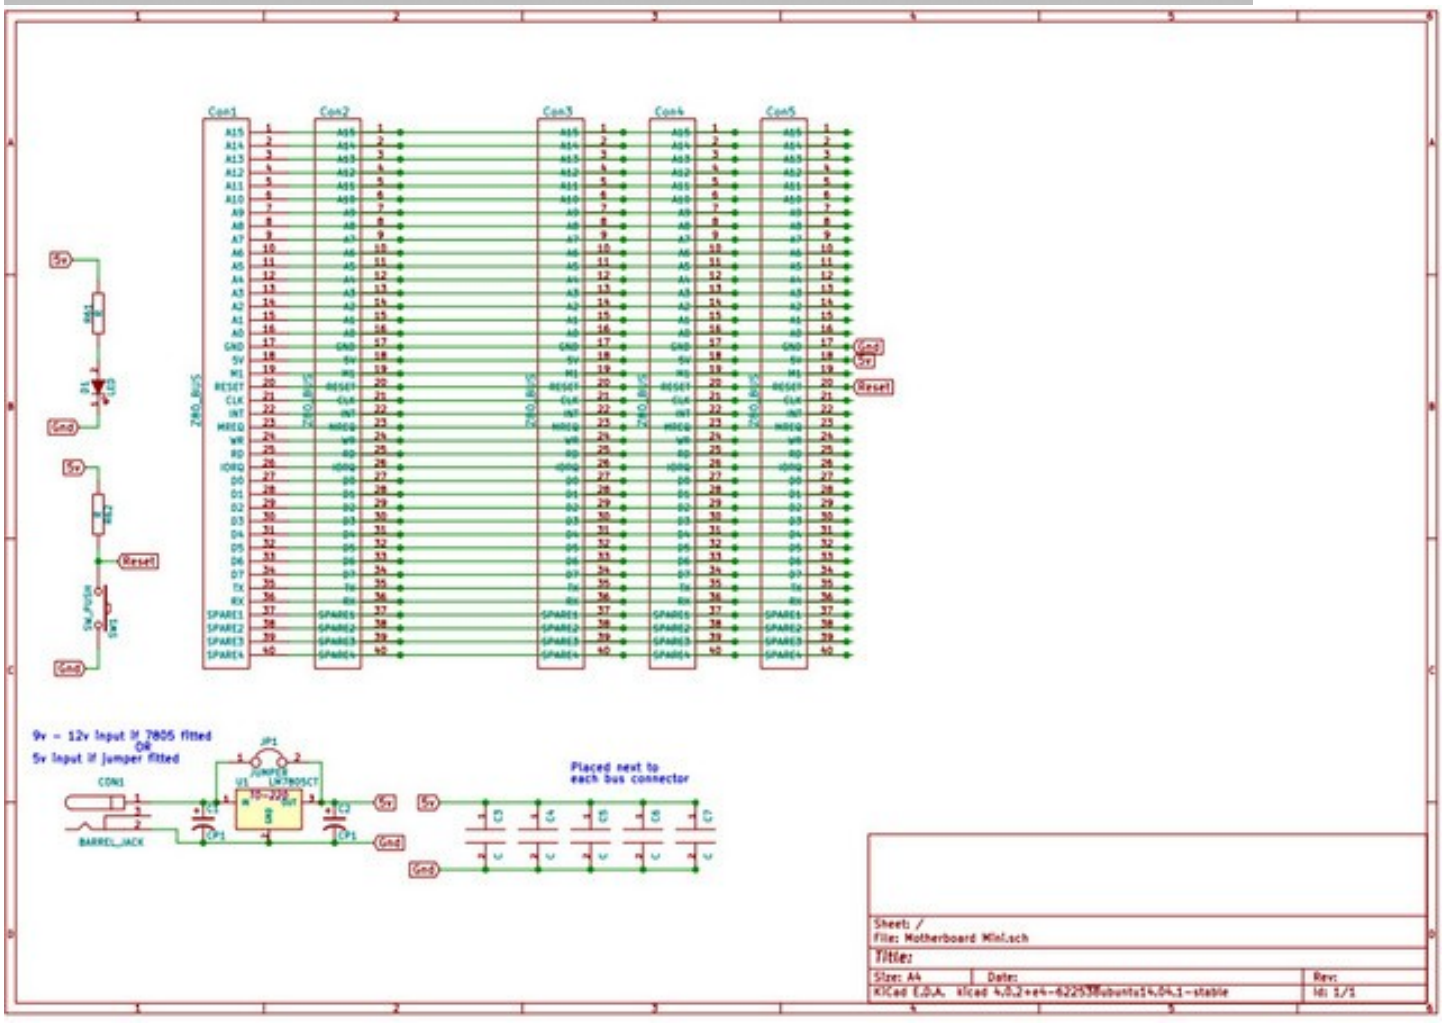
Pro Tip: LED Cathode marked K is short lead