


RC2014



- * Suggested configuration is shown using slots 2-6
 - * Wire links, jumpers or resistors needed if slot 1&2 or 7&8 used
 - * 5v input via barrel jack if jumper fitted.
 - * Optional 7805 regulator & 10uf caps for 9-15v input (cover jumper tabs with tape)
 - * Decoupling caps next to each slot
- Pro Tip:** LED Cathode marked K is short lead

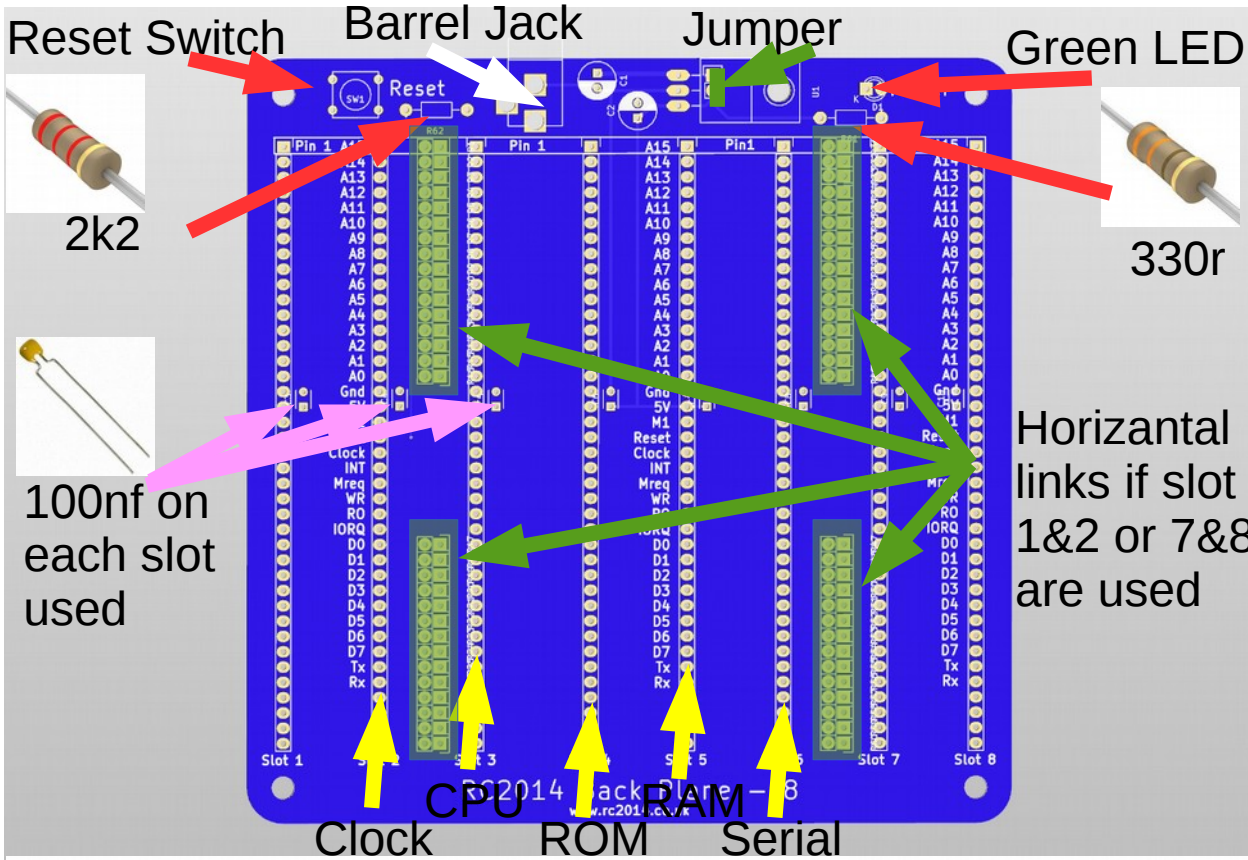